



**Diagram A**  
Diagram not to scale

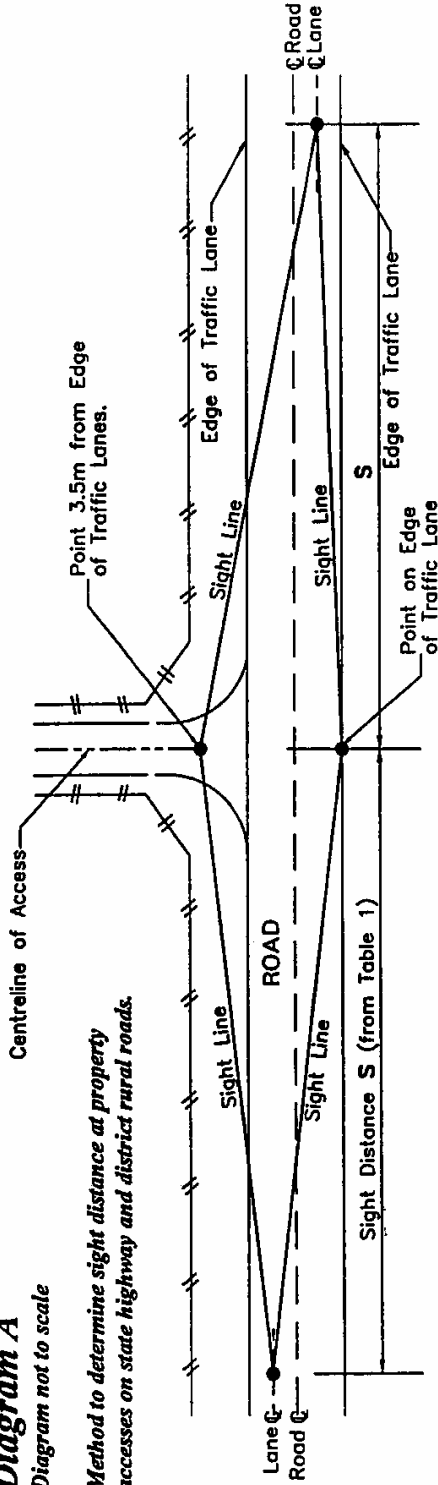

NOTE: Sight Distances shall be measured to and from a height of 1.15 metres above the existing road surface and the proposed surface level of the side road or access. There are to be no obstructions to visibility inside the area bounded by the sight lines.

**Diagram B**  
Diagram not to scale


Minimum spacing between adjacent property accesses and location relative to intersections on state highways and district rural roads.

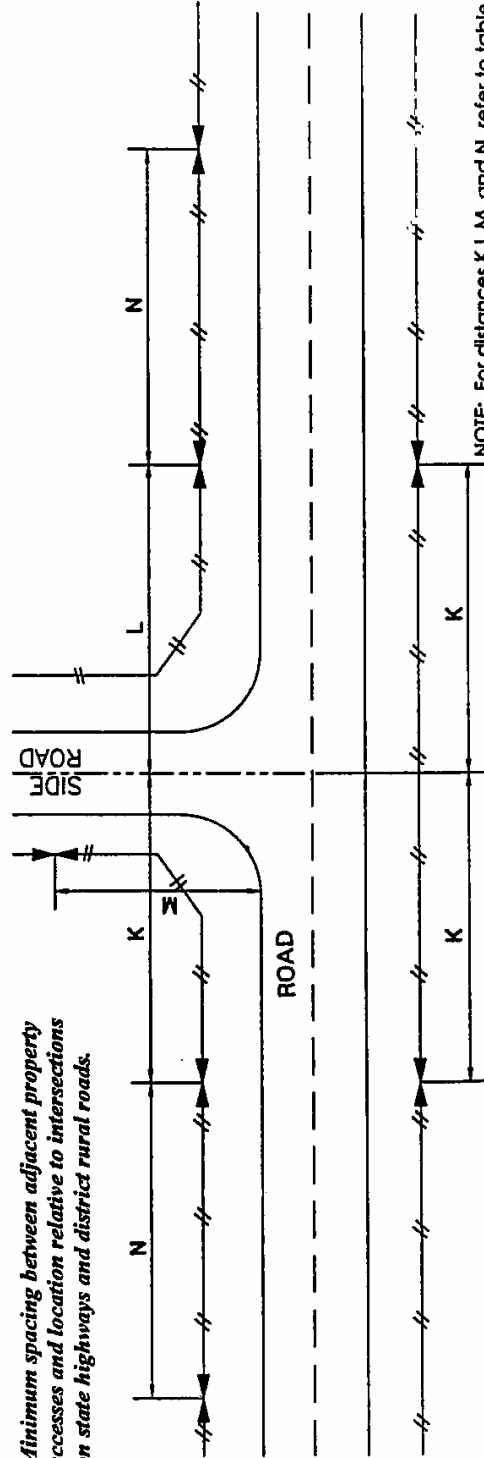

**Diagram C**

*Diagram not to scale*


Crossing treatment for accesses on rural state highways, with traffic generation of less than 30 vehicle movement equivalent per day.

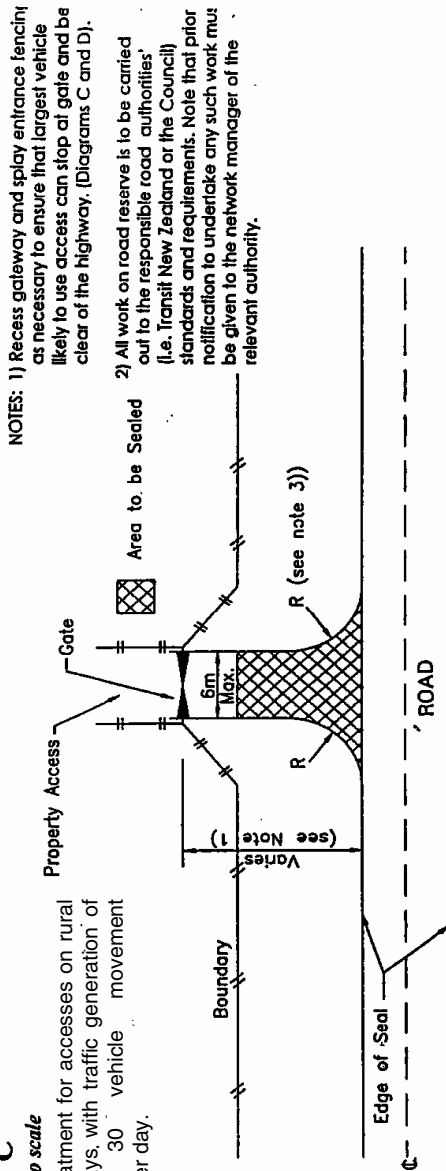


**Diagram D**


*Diagram not to scale*

Localised road widening and crossing treatment for accesses on rural state highways with traffic generation between 30 and 60 vehicle movements per day.

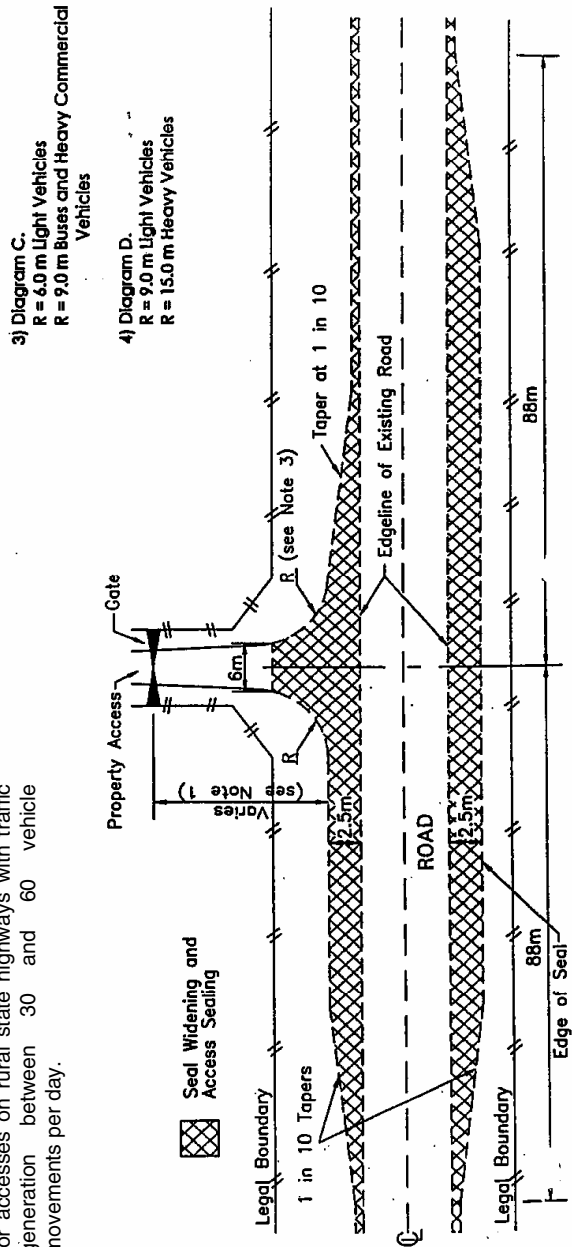

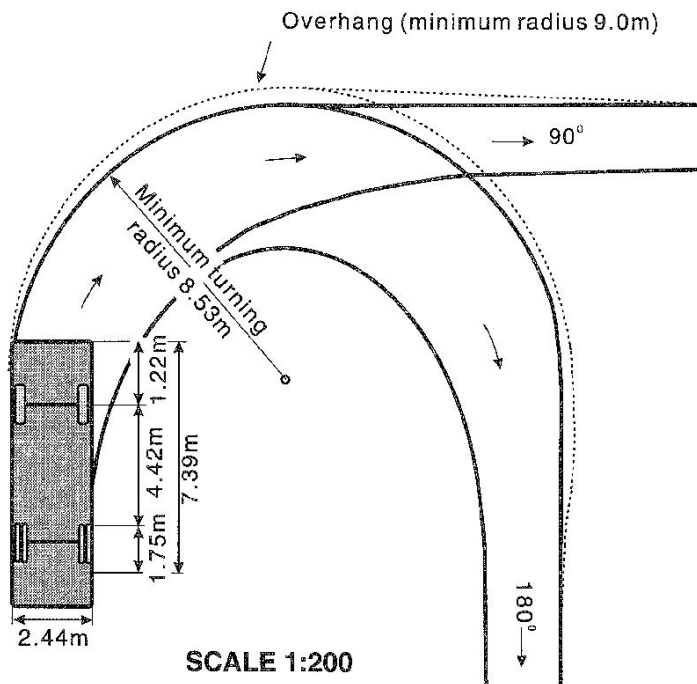

TRACKING CURVE FOR 90 PERCENTILE TRUCK

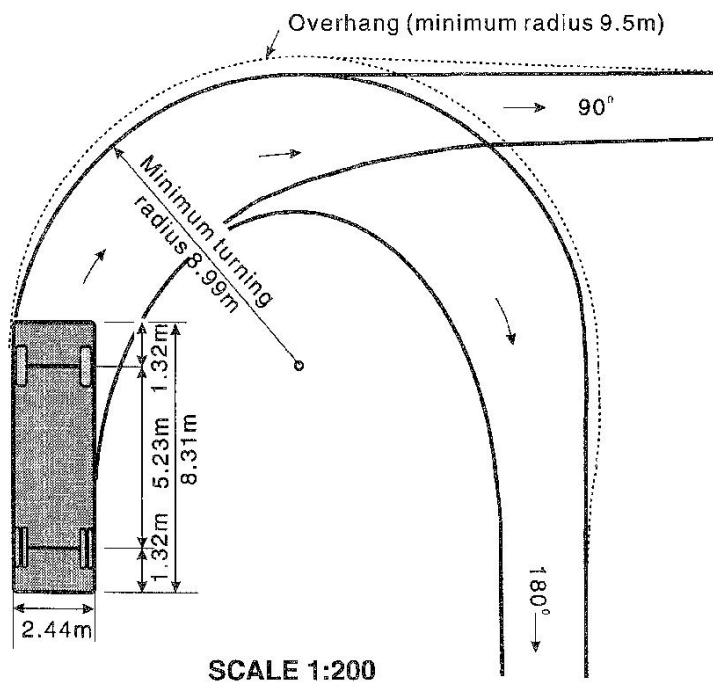

TRACKING CURVE FOR 99 PERCENTILE TRUCK

- Note:
- Minimum recommended clearance for both sides of the vehicle is 600mm
  - Minimum turning radius - required extent of hard surface
  - Minimum overhang radius - area required to be kept clear of obstruction