



*Christchurch City Council*

**Chaney's Plantation  
Shed/Open Garage  
PRK 0388 BLDG 002 EQ2**

**Detailed Engineering Evaluation**

**Quantitative Assessment Report**




*Christchurch City Council*

---

# **Chaney's Plantation Shed/Open Garage Quantitative Assessment Report**


Prepared By

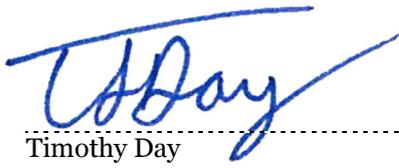

.....  
Timothy Day  
Graduate Structural Engineer

Opus International Consultants Ltd  
Christchurch Office  
20 Moorhouse Avenue  
PO Box 1482, Christchurch Mail  
Centre, Christchurch 8140  
New Zealand

Reviewed By

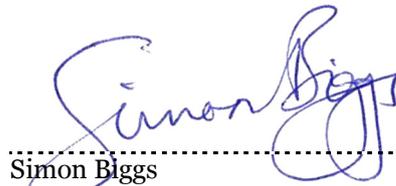

.....  
Simon Biggs  
Structural Engineer

Telephone: +64 3 363 5400  
Facsimile: +64 3 365 7858

Date: April 2013  
Reference: 6-QUCC1.69  
Status: Final

Approved By



.....  
David Dekker  
Principal Structural Engineer  
MIPENZ, CPEng 1003026

# Summary

Chaney's Plantation – Shed/Open Garage  
PRK 0388 BLDG 002 EQ2

Detailed Engineering Evaluation  
Quantitative Report - Summary  
Final

## **Background**

This is a summary of the quantitative report for the Chaney's Plantation Shed, and is based on the Detailed Engineering Evaluation Procedure document (draft) issued by the Structural Advisory Group on 19 July 2011 and visual inspections on the 10 June & 4 September 2012.

## **Key Damage Observed**

No damage was observed.

## **Critical Structural Weaknesses**

No critical structural weaknesses were identified in this building.

## **Indicative Building Strength**

Based on the information available, and from undertaking a quantitative assessment, the building's seismic capacity has been assessed as greater than 100%NBS, and is therefore not classed as an earthquake prone building under the NZSEE classification system.

# Contents

<b>Summary .....</b>	<b>i</b>
<b>1 Introduction.....</b>	<b>1</b>
<b>2 Compliance .....</b>	<b>1</b>
<b>3 Earthquake Resistance Standards.....</b>	<b>4</b>
<b>4 Building Description .....</b>	<b>7</b>
<b>5 Damage Assessment.....</b>	<b>8</b>
<b>6 General Observations.....</b>	<b>8</b>
<b>7 Detailed Seismic Assessment .....</b>	<b>8</b>
<b>8 Summary of Geotechnical Appraisal .....</b>	<b>9</b>
<b>9 Conclusions.....</b>	<b>9</b>
<b>10 Limitations.....</b>	<b>10</b>
<b>11 References .....</b>	<b>10</b>
 <b>Appendix 1 - Photographs</b>	
 <b>Appendix 2 – CERA DEE Spreadsheet</b>	

# 1 Introduction

Opus International Consultants Limited has been engaged by Christchurch City Council to undertake a detailed seismic assessment of the Plantation Shed/Open Garage, located at Forestry Road, Chaney's, Christchurch, following the Canterbury Earthquake Sequence since September 2010.

The purpose of the assessment is to determine if the building is classed as being earthquake prone in accordance with the Building Act 2004.

The seismic assessment and reporting have been undertaken based on the qualitative and quantitative procedures detailed in the Detailed Engineering Evaluation Procedure (DEEP) document (draft) issued by the Structural Engineering Society (SESOC) [3] [4].

## 2 Compliance

This section contains a brief summary of the requirements of the various statutes and authorities that control activities in relation to buildings in Christchurch at present.

### 2.1 Canterbury Earthquake Recovery Authority (CERA)

CERA was established on 28 March 2011 to take control of the recovery of Christchurch using powers established by the Canterbury Earthquake Recovery Act enacted on 18 April 2011. This act gives the Chief Executive Officer of CERA wide powers in relation to building safety, demolition and repair. Two relevant sections are:

#### Section 38 – Works

This section outlines a process in which the chief executive can give notice that a building is to be demolished and if the owner does not carry out the demolition, the chief executive can commission the demolition and recover the costs from the owner or by placing a charge on the owners' land.

#### Section 51 – Requiring Structural Survey

This section enables the chief executive to require a building owner, insurer or mortgagee to carry out a full structural survey before the building is re-occupied.

We understand that CERA require a detailed engineering evaluation to be carried out for all buildings (other than those exempt from the Earthquake Prone Building definition in the Building Act). CERA have adopted the Detailed Engineering Evaluation Procedure (DEEP) document (draft) issued by the Structural Engineering Society (SESOC) on 19 July 2011. This document sets out a methodology for both initial qualitative and detailed quantitative assessments.

It is anticipated that a number of factors, including the following, will determine the extent of evaluation and strengthening level required:

1. The importance level and occupancy of the building.

2. The placard status and amount of damage.
3. The age and structural type of the building.
4. Consideration of any critical structural weaknesses.

Christchurch City Council requires any building with a capacity of less than 34% of New Building Standard (including consideration of critical structural weaknesses) to be strengthened to a target of 67% as required under the CCC Earthquake Prone Building Policy.

## 2.2 Building Act

Several sections of the Building Act are relevant when considering structural requirements:

### Section 112 - Alterations

This section requires that an existing building complies with the relevant sections of the Building Code to at least the extent that it did prior to the alteration. This effectively means that a building cannot be weakened as a result of an alteration (including partial demolition).

The Earthquake Prone Building policy for the territorial authority shall apply as outlined in Section 2.3 of this report.

### Section 115 – Change of Use

This section requires that the territorial authority is satisfied that the building with a new use complies with the relevant sections of the Building Code ‘as near as is reasonably practicable’.

This is typically interpreted by territorial authorities as being 67% of the strength of an equivalent new building or as near as practicable. This is also the minimum level recommended by the New Zealand Society for Earthquake Engineering (NZSEE).

### Section 121 – Dangerous Buildings

This section was extended by the Canterbury Earthquake (Building Act) Order 2010, and defines a building as dangerous if:

1. In the ordinary course of events (excluding the occurrence of an earthquake), the building is likely to cause injury or death or damage to other property; or
2. In the event of fire, injury or death to any persons in the building or on other property is likely because of fire hazard or the occupancy of the building; or
3. There is a risk that the building could collapse or otherwise cause injury or death as a result of earthquake shaking that is less than a ‘moderate earthquake’ (refer to Section 122 below); or
4. There is a risk that other property could collapse or otherwise cause injury or death; or

5. A territorial authority has not been able to undertake an inspection to determine whether the building is dangerous.

### **Section 122 – Earthquake Prone Buildings**

This section defines a building as earthquake prone (EPB) if its ultimate capacity would be exceeded in a 'moderate earthquake' and it would be likely to collapse causing injury or death, or damage to other property.

A moderate earthquake is defined by the building regulations as one that would generate loads 33% of those used to design an equivalent new building.

### **Section 124 – Powers of Territorial Authorities**

This section gives the territorial authority the power to require strengthening work within specified timeframes or to close and prevent occupancy to any building defined as dangerous or earthquake prone.

### **Section 131 – Earthquake Prone Building Policy**

This section requires the territorial authority to adopt a specific policy for earthquake prone, dangerous and insanitary buildings.

## **2.3 Christchurch City Council Policy**

Christchurch City Council adopted their Earthquake Prone, Dangerous and Insanitary Building Policy in 2006. This policy was amended immediately following the Darfield Earthquake on 4 September 2010.

The 2010 amendment includes the following:

1. A process for identifying, categorising and prioritising Earthquake Prone Buildings, commencing on 1 July 2012;
2. A strengthening target level of 67% of a new building for buildings that are Earthquake Prone;
3. A timeframe of 15-30 years for Earthquake Prone Buildings to be strengthened; and,
4. Repair works for buildings damaged by earthquakes will be required to comply with the above.

The council has stated their willingness to consider retrofit proposals on a case by case basis, considering the economic impact of such a retrofit.

If strengthening works are undertaken, a building consent will be required. A requirement of the consent will require upgrade of the building to comply 'as near as is reasonably practicable' with:

- The accessibility requirements of the Building Code.

- The fire requirements of the Building Code. This is likely to require a fire report to be submitted with the building consent application.

Where an application for a change of use of a building is made to Council, the building will be required to be strengthened to 67% of New Building Standard or as near as is reasonably practicable.

## 2.4 Building Code

The Building Code outlines performance standards for buildings and the Building Act requires that all new buildings comply with this code. Compliance Documents published by The Department of Building and Housing can be used to demonstrate compliance with the Building Code.

On 19 May 2011, Compliance Document B1: Structure was amended to include increased seismic design requirements for Canterbury as follows:

- increase in the basic seismic design load for the Canterbury earthquake region (Z factor increased to 0.3 equating to an increase of 36 – 47% depending on location within the region);
- Increased serviceability requirements.

## 2.5 Institution of Professional Engineers New Zealand (IPENZ) Code of Ethics

One of the core ethical values of professional engineers in New Zealand is the protection of life and safeguarding of people. The IPENZ Code of Ethics requires that:

*Members shall recognise the need to protect life and to safeguard people, and in their engineering activities shall act to address this need.*

1.1 *Giving Priority to the safety and well-being of the community and having regard to this principle in assessing obligations to clients, employers and colleagues.*

1.2 *Ensuring that reasonable steps are taken to minimise the risk of loss of life, injury or suffering which may result from your engineering activities, either directly or indirectly.*

All recommendations on building occupancy and access must be made with these fundamental obligations in mind.

## 3 Earthquake Resistance Standards

For this assessment, the building's earthquake resistance is compared with the current New Zealand Building Code requirements for a new building constructed on the site. This is expressed as a percentage of new building standard (%NBS). The loadings are in accordance with the current earthquake loading standard NZS1170.5 [1].

A generally accepted classification of earthquake risk for existing buildings in terms of %NBS that has been proposed by the NZSEE 2006 [2] is presented in Figure 1 below.

Description	Grade	Risk	%NBS	Existing Building Structural Performance	Improvement of Structural Performance	
					Legal Requirement	NZSEE Recommendation
Low Risk Building	A or B	Low	Above 67	Acceptable (improvement may be desirable)	The Building Act sets no required level of structural improvement (unless change in use) This is for each TA to decide. Improvement is not limited to 34%NBS.	100%NBS desirable. Improvement should achieve at least 67%NBS
Moderate Risk Building	C	Moderate	34 to 66	Acceptable legally. Improvement recommended		Not recommended. Acceptable only in exceptional circumstances
High Risk Building	D or E	High	33 or lower	Unacceptable (Improvement required under Act)	Unacceptable	Unacceptable

Figure 1: NZSEE Risk Classifications Extracted from table 2.2 of the NZSEE 2006 AISPBE Guidelines

Table 1 below compares the percentage NBS to the relative risk of the building failing in a seismic event with a 10% risk of exceedance in 50 years (i.e. 0.2% in the next year).

Table 1: %NBS compared to relative risk of failure

Percentage of New Building Standard (%NBS)	Relative Risk (Approximate)
>100	<1 time
80-100	1-2 times
67-80	2-5 times
33-67	5-10 times
20-33	10-25 times
<20	>25 times

### 3.1 Minimum and Recommended Standards

Based on governing policy and recent observations, Opus makes the following general recommendations:

### 3.1.1 Occupancy

The Canterbury Earthquake Order<sup>1</sup> in Council 16 September 2010, modified the meaning of “dangerous building” to include buildings that were identified as being EPB’s. As a result of this, we would expect such a building would be issued with a Section 124 notice, by the Territorial Authority, or CERA acting on their behalf, once they are made aware of our assessment. Based on information received from CERA to date and from the DBH guidance document dated 12 June 2012 [6], this notice is likely to prohibit occupancy of the building (or parts thereof), until its seismic capacity is improved to the point that it is no longer considered an EPB.

### 3.1.2 Cordoning

Where there is an overhead falling hazard, or potential collapse hazard of the building, the areas of concern should be cordoned off in accordance with current CERA/territorial authority guidelines.

### 3.1.3 Strengthening

Industry guidelines (NZSEE 2006 [2]) strongly recommend that every effort be made to achieve improvement to at least 67%NBS. A strengthening solution to anything less than 67%NBS would not provide an adequate reduction to the level of risk.

It should be noted that full compliance with the current building code requires building strength of 100%NBS.

### 3.1.4 Our Ethical Obligation

In accordance with the IPENZ code of ethics, we have a duty of care to the public. This obligation requires us to identify and inform CERA of potentially dangerous buildings; this would include earthquake prone buildings.

---

<sup>1</sup> This Order only applies to buildings within the Christchurch City, Selwyn District and Waimakariri District Councils authority

## 4 Building Description

### 4.1 General

The Chaney's Plantation Shed/Open Garage is a single storey timber pole structure. It has a corrugated iron roof supported by timber purlins and four bolted timber framed portals. Our site inspection indicated Versatile manufactured the shed.

### 4.2 Location



Figure 2 - Location of Plantation Shed/Open Garage (Image from Google Earth)

### 4.3 Survey

A building measure-up and photographic survey was undertaken by Opus on 27 July 2012 and 13 January 2013.

### 4.4 Original Documentation

The original drawings of the building were not available. Copies of the design calculations were not provided.

Our drawings and measure-up have been used to confirm the structural systems, investigate potential critical structural weaknesses (CSW) and identify details which required particular attention.

## 5 Damage Assessment

The building structure does not appear to have suffered any damage as a result of the recent earthquake events.

## 6 General Observations

Overall the building has performed well under seismic conditions which would be expected for single storey timber pole structure. The building has sustained no apparent damage and continues to be fully operational.

## 7 Detailed Seismic Assessment

The detailed seismic assessment has been based on the NZSEE 2006 [2] guidelines for the “Assessment and Improvement of the Structural Performance of Buildings in Earthquakes” together with the “Guidance on Detailed Engineering Evaluation of Earthquake Affected Non-residential Buildings in Canterbury, Part 2 Evaluation Procedure” [3] draft document prepared by the Engineering Advisory Group on 19 July 2011, and the SESOC guidelines “Practice Note – Design of Conventional Structural Systems Following Canterbury Earthquakes” [5] issued on 21 December 2011.

### 7.1 Critical Structural Weaknesses

The term Critical Structural Weakness (CSW) refers to a component of a building that could contribute to increased levels of damage or cause premature collapse of a building. No CSW's were identified during the quantitative analysis.

### 7.2 Seismic Coefficient Parameters

The seismic design parameters based on current design requirements from NZS1170.5:2004 and the NZBC clause B1 for this building are:

- Site soil class D, clause 3.1.3 NZS 1170.5:2004;
- Site hazard factor,  $Z=0.3$ , B1/VM1 clause 2.2.14B;
- Return period factor,  $R_u = 1.0$  from Table 3.5, NZS 1170.5:2004, for an Importance Level 2 structure with a 50 year design life;
- Structural Ductility Factor,  $\mu_{max} = 1.25$

### 7.3 Detailed Seismic Assessment Results

A summary of the structural performance of the building is shown in the following table. Note that the values given represent the worst performing elements in the building, as these effectively define the building's capacity. Other elements within the building may have significantly greater capacity when compared with the governing elements.

**Table 2: Summary of Seismic Performance**

<b>Structural Element/System</b>	<b>Failure mode and description of limiting criteria</b>	<b>% NBS based on calculated capacity</b>
Walls Across	Timber Framing	100 % NBS
Walls Along	Timber Framing	100 % NBS

## 7.4 Limitations and Assumptions in Results

The observed level of damage suffered by the building was deemed low enough to not affect the capacity. Therefore the analysis and assessment of the building was based on it being in an undamaged state. There may have been damage to the building that was unable to be observed that could cause the capacity of the building to be reduced; therefore the current capacity of the building may be lower than that stated.

The results have been reported as a %NBS and the stated value is that obtained from our analysis and assessment. Despite the use of best national and international practice in this analysis and assessment, this value contains uncertainty due to the many assumptions and simplifications which are made during the assessment. These include:

- a. Simplifications made in the analysis, including boundary conditions such as foundation fixity.
- b. Assessments of material strengths based on limited drawings, specifications and site inspections
- c. The normal variation in material properties which change from batch to batch.
- d. Approximations made in the assessment of the capacity of each element, especially when considering the post-yield behaviour.

## 8 Summary of Geotechnical Appraisal

Due to a lack of observed ground damage, no specific geotechnical assessment has been undertaken for this site. The site parameters used for the structural analysis have been taken as site subsoil class D, based on geotechnical advice.

## 9 Conclusions

- a) The building has a seismic capacity of 100% NBS and is therefore not classed as an earthquake prone building under the NZSEE classification system,
- b) No strengthening or remedial works are required for the building.
- c) The site and existing foundations have performed satisfactorily, and no geotechnical testing is required.

## 10 Limitations

- a) This report is based on an inspection of the structure with a focus on the damage sustained from the 22 February 2011 Canterbury Earthquake and aftershocks only. Some non-structural damage is mentioned but this is not intended to be a comprehensive list of non-structural items.
- b) Our professional services are performed using a degree of care and skill normally exercised, under similar circumstances, by reputable consultants practicing in this field at the time.
- c) This report is prepared for the CCC to assist with assessing remedial works required for council buildings and facilities. It is not intended for any other party or purpose.

## 11 References

- [1] NZS 1170.5: 2004, Structural design actions, Part 5 Earthquake actions, Standards New Zealand.
- [2] NZSEE (2006), Assessment and improvement of the structural performance of buildings in earthquakes, New Zealand Society for Earthquake Engineering.
- [3] Engineering Advisory Group, Guidance on Detailed Engineering Evaluation of Earthquake Affected Non-residential Buildings in Canterbury, Part 2 Evaluation Procedure, Draft Prepared by the Engineering Advisory Group, Revision 5, 19 July 2011.
- [4] Engineering Advisory Group, *Guidance on Detailed Engineering Evaluation of Non-residential buildings, Part 3 Technical Guidance*, Draft Prepared by the Engineering Advisory Group, 13 December 2011.
- [5] SESOC (2011), Practice Note – Design of Conventional Structural Systems Following Canterbury Earthquakes, Structural Engineering Society of New Zealand, 21 December 2011.
- [6] DBH (2012), Guidance for engineers assessing the seismic performance of non-residential and multi-unit residential buildings in greater Christchurch, Department of Building and Housing, June 2012.

## Appendix 1 - Photographs

Chaney's Plantation Shed/Open Garage		
No.	Item description	Photo
1.	Front View	
2.	Side View	
3.	Diagonal Roof Straps	

<p>4.</p>	<p>Fixing details at open end of roof rafters</p>	
<p>5.</p>	<p>Knee brace at corners of internal timber frames</p>	
<p>6.</p>	<p>Fixing of knee brace to post</p>	

7.	Timber Roof Purlins	
8.	Versatile manufacturer logo on buildings	

## **Appendix 2 – CERA DEE Spreadsheet**

<b>Location</b>		Building Name: <input type="text" value="Chaney's Plantation - Shed"/>	Unit No: <input type="text" value=""/>	Street: <input type="text" value="Spencerville Road"/>	Reviewer: <input type="text" value="Dave Dekker"/>
Building Address: <input type="text" value=""/>	Legal Description: <input type="text" value=""/>				CPEng No: <input type="text" value="1003026"/>
			Company: <input type="text" value="Opus International Consultants"/>		
			Company project number: <input type="text" value="GUCC1.69"/>		
			Company phone number: <input type="text" value="03 363 5400"/>		
GPS south: <input type="text" value="43 25 49.54"/>		Degrees Min Sec		Date of submission: <input type="text" value="12-Apr-13"/>	
GPS east: <input type="text" value="172 39 17.82"/>				Inspection Date: <input type="text" value="27-Jul-12"/>	
Building Unique Identifier (CCC): <input type="text" value="PRK 0388 BLDG 002 EQ2"/>				Revision: <input type="text" value="Final"/>	
				Is there a full report with this summary? <input type="text" value="yes"/>	

<b>Site</b>	Site slope: <input type="text" value="flat"/>	Max retaining height (m): <input type="text" value=""/>
	Soil type: <input type="text" value=""/>	Soil Profile (if available): <input type="text" value=""/>
	Site Class (to NZS1170.5): <input type="text" value="D"/>	
	Proximity to waterway (m, if <100m): <input type="text" value=""/>	If Ground improvement on site, describe: <input type="text" value=""/>
	Proximity to cliff top (m, if < 100m): <input type="text" value=""/>	
	Proximity to cliff base (m,if <100m): <input type="text" value=""/>	Approx site elevation (m): <input type="text" value=""/>

<b>Building</b>	No. of storeys above ground: <input type="text" value="1"/>	single storey = 1	Ground floor elevation (Absolute) (m): <input type="text" value=""/>
	Ground floor split?: <input type="text" value="no"/>		Ground floor elevation above ground (m): <input type="text" value=""/>
	Storeys below ground: <input type="text" value="0"/>		
	Foundation type: <input type="text" value="strip footings"/>		if Foundation type is other, describe: <input type="text" value=""/>
	Building height (m): <input type="text" value="3.20"/>	height from ground to level of uppermost seismic mass (for IEP only) (m): <input type="text" value=""/>	
	Floor footprint area (approx): <input type="text" value="72"/>		Date of design: <input type="text" value=""/>
	Age of Building (years): <input type="text" value="20"/>		
	Strengthening present?: <input type="text" value="no"/>		If so, when (year)? <input type="text" value=""/>
	Use (ground floor): <input type="text" value="public"/>		And what load level (%g)? <input type="text" value=""/>
	Use (upper floors): <input type="text" value=""/>		Brief strengthening description: <input type="text" value=""/>
	Use notes (if required): <input type="text" value=""/>		
	Importance level (to NZS1170.5): <input type="text" value="IL2"/>		

<b>Gravity Structure</b>	Gravity System: <input type="text" value="frame system"/>	
	Roof: <input type="text" value="timber framed"/>	rafter type, purlin type and cladding: <input type="text" value=""/>
	Floors: <input type="text" value=""/>	
	Beams: <input type="text" value=""/>	
	Columns: <input type="text" value=""/>	
	Walls: <input type="text" value=""/>	

<b>Lateral load resisting structure</b>	Lateral system along: <input type="text" value="lightweight timber framed walls"/>	Note: Define along and across in detailed report!	note typical wall length (m) <input type="text" value=""/>
	Ductility assumed, μ: <input type="text" value="1.25"/>		estimate or calculation? <input type="text" value="estimated"/>
	Period along: <input type="text" value="0.40"/>		estimate or calculation? <input type="text" value="estimated"/>
	Total deflection (ULS) (mm): <input type="text" value="1"/>		estimate or calculation? <input type="text" value="estimated"/>
	maximum interstorey deflection (ULS) (mm): <input type="text" value="1"/>		
	Lateral system across: <input type="text" value="lightweight timber framed walls"/>		note typical wall length (m) <input type="text" value=""/>
	Ductility assumed, μ: <input type="text" value="1.25"/>		estimate or calculation? <input type="text" value="estimated"/>
	Period across: <input type="text" value="0.40"/>		estimate or calculation? <input type="text" value="estimated"/>
	Total deflection (ULS) (mm): <input type="text" value="1"/>		estimate or calculation? <input type="text" value="estimated"/>
	maximum interstorey deflection (ULS) (mm): <input type="text" value="1"/>		

<b>Separations:</b>	north (mm): <input type="text" value=""/>	leave blank if not relevant
	east (mm): <input type="text" value=""/>	
	south (mm): <input type="text" value=""/>	
	west (mm): <input type="text" value=""/>	

<b>Non-structural elements</b>	Stairs: <input type="text" value=""/>	describe: <input type="text" value=""/>
	Wall cladding: <input type="text" value="other light"/>	describe: <input type="text" value="corrugated iron"/>
	Roof Cladding: <input type="text" value="Metal"/>	describe: <input type="text" value="profiled sheet"/>
	Glazing: <input type="text" value="timber frames"/>	
	Ceilings: <input type="text" value="none"/>	
	Services(list): <input type="text" value=""/>	

<b>Available documentation</b>	Architectural: <input type="text" value="none"/>	original designer name/date: <input type="text" value=""/>
	Structural: <input type="text" value="none"/>	original designer name/date: <input type="text" value=""/>
	Mechanical: <input type="text" value="none"/>	original designer name/date: <input type="text" value=""/>
	Electrical: <input type="text" value="none"/>	original designer name/date: <input type="text" value=""/>
	Geotech report: <input type="text" value="none"/>	original designer name/date: <input type="text" value=""/>

<b>Damage</b>	Site performance: <input type="text" value="no site disturbance"/>	Describe damage: <input type="text" value=""/>
<b>Site:</b> (refer DEE Table 4-2)	Settlement: <input type="text" value="none observed"/>	notes (if applicable): <input type="text" value=""/>
	Differential settlement: <input type="text" value="none observed"/>	notes (if applicable): <input type="text" value=""/>
	Liquefaction: <input type="text" value="none apparent"/>	notes (if applicable): <input type="text" value=""/>
	Lateral Spread: <input type="text" value="none apparent"/>	notes (if applicable): <input type="text" value=""/>
	Differential lateral spread: <input type="text" value="none apparent"/>	notes (if applicable): <input type="text" value=""/>
	Ground cracks: <input type="text" value="none apparent"/>	notes (if applicable): <input type="text" value=""/>
	Damage to area: <input type="text" value="none apparent"/>	notes (if applicable): <input type="text" value=""/>

<b>Building:</b>	Current Placard Status: <input type="text" value=""/>	
Along	Damage ratio: <input type="text" value="0%"/>	Describe how damage ratio arrived at: <input type="text" value=""/>
	Describe (summary): <input type="text" value=""/>	
Across	Damage ratio: <input type="text" value="0%"/>	$Damage\_Ratio = \frac{(\%NBS\ (before) - \%NBS\ (after))}{\%NBS\ (before)}$
	Describe (summary): <input type="text" value=""/>	
Diaphragms	Damage?: <input type="text" value=""/>	Describe: <input type="text" value=""/>
CSWs:	Damage?: <input type="text" value=""/>	Describe: <input type="text" value=""/>
Pounding:	Damage?: <input type="text" value=""/>	Describe: <input type="text" value=""/>
Non-structural:	Damage?: <input type="text" value=""/>	Describe: <input type="text" value=""/>

<b>Recommendations</b>	Level of repair/strengthening required: <input type="text" value="none"/>	Describe: <input type="text" value=""/>
	Building Consent required: <input type="text" value=""/>	Describe: <input type="text" value=""/>
	Interim occupancy recommendations: <input type="text" value="full occupancy"/>	Describe: <input type="text" value=""/>
Along	Assessed %NBS before e'quakes: <input type="text" value="100%"/>	#### %NBS from IEP below If IEP not used, please detail assessment methodology: <input type="text" value="Quantitative"/>
	Assessed %NBS after e'quakes: <input type="text" value="100%"/>	
Across	Assessed %NBS before e'quakes: <input type="text" value="100%"/>	#### %NBS from IEP below
	Assessed %NBS after e'quakes: <input type="text" value="100%"/>	



**Opus International Consultants Ltd**  
20 Moorhouse Avenue  
PO Box 1482, Christchurch Mail Centre,  
Christchurch 8140  
New Zealand

t: +64 3 363 5400  
f: +64 3 365 7858  
w: [www.opus.co.nz](http://www.opus.co.nz)